

## Fanless slim PC platform with Intel Atom "Cedar View" Dual Core CPU

The Shuttle XS35V3 is an extremely slim and ergonomic Mini PC that works highly energy-efficiently. With a power consumption that is barely worth mentioning, its noise level is close to zero. This PC platform is powered by an Intel Atom D2700 dual-core processor (2x 2.16 GHz) with integrated GMA 3650 graphics. Because of its completely fanless case layout, it is virtually maintenance-free and noiseless. The 38mm thin case of the XS35V3 provides room for one slim-line optical drive and one 2.5in hard disk or SSD. WLAN (n) and a card reader are already built in. It sports an array of connectors too which include HDMI, D-Sub (VGA), 5x USB, VGA, Gigabit-LAN and audio ports.

### Feature Highlights

<b>Chassis</b>	<ul style="list-style-type: none"> <li>Slim 1.5 litre chassis</li> <li>Dimensions: 25.2 x 16.2 x 3.85 cm</li> <li>Hole for the Kensington Lock</li> <li>Optional: VESA75/100 mounting kit PV01</li> </ul>
<b>Operating system</b>	<ul style="list-style-type: none"> <li>Without operating system</li> <li>Compatible with Windows 7 (32 bit)</li> </ul>
<b>CPU</b>	<ul style="list-style-type: none"> <li>Intel Atom D2700 Dual Core (2.16GHz)</li> </ul>
<b>Chipset</b>	<ul style="list-style-type: none"> <li>Intel NM10 Express Chipset</li> </ul>
<b>Graphics</b>	<ul style="list-style-type: none"> <li>Integrated Intel GMA3650 Graphics</li> <li>Shared Memory: max. 384MB DVMT</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>2x SO-DIMM socket (204 pins)</li> <li>Supports max. 4GB DDR3-1066</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>Supports one optical slimline drive</li> <li>Supports one 2.5" SATA hard disk or SSD</li> <li>With 4-in-1 card reader</li> </ul>
<b>Connectors and WLAN</b>	<ul style="list-style-type: none"> <li>HDMI v1.3</li> <li>D-Sub VGA</li> <li>5x USB 2.0 (1x front, 4x rear)</li> <li>Microphone input</li> <li>Headphones output (Line-out)</li> <li>Gigabit-LAN</li> <li>WLAN 802.11 b/g/n</li> </ul>
<b>Power supply</b>	<ul style="list-style-type: none"> <li>External 40W fanless power supply</li> </ul>
<b>Applications</b>	<ul style="list-style-type: none"> <li>Basic and Home-Media</li> </ul>

Images are only for illustration purposes.  
The optical drive is not included.

## Barebone **XS35V3** Slim PC



Fanless



©2012 by Shuttle Computer Handels GmbH (Germany). All information subject to change without notice. Pictures for illustration purposes only.

## Shuttle Barebone XS35V3 - Product Features




### Slim and stylish

Designed as a space-saver, this sleek 1.5 litre nettop PC only measures 3.8cm in width. It maximizes space whether it is placed upright using its stylish stand or affixed to the back of a display with the optional VESA mounting kit (PV01). Due to its small size and flexible design, this practical nettop offers exceptional functionality and is well-suited for home users, small offices, reception areas, classrooms, libraries, showrooms, call centres, public institutions and more.



### Fanless and quiet

The Shuttle Barebone XS35V3 comes totally fanless making it perfect to be used in noise-sensitive environments such as living rooms, hospitals, libraries etc. As an additional benefit, fanless cases rarely gather dust on the inside and stay cleaner than others. So it's not only quiet and low in energy use, but also dust-free and virtually maintenance free.

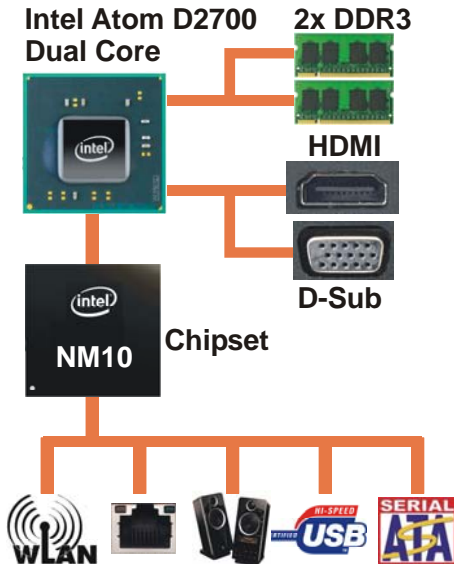

### The Atom processor integrates the graphics controller

Shuttle XS35V3 is equipped with Intel's Atom D2700 processor (2,16GHz, codenamed Cedarview). It comes with both the memory controller and graphics core on-die which helps to keep heat dissipation and memory latency low. The CPU is connected to the Southbridge NM10, codenamed Tiger Point.

### Dual Core. Do more.

Shuttle always uses the dual-core variant of Intel's Atom processors and thus integrates the Atom D2700. This boosts the system performance significantly with particular regards to multi-threaded applications.

### Highly energy-saving

The XS35V3 barely consumes, depending on system load, about 16~20 Watts. Running the device\*) 5 days a week for eight hours a day, the annual consumption would amount to less than 40kWh which would mean just 8 Euros on the power bill (20 Euro ct/kWh) - way less than a conventional desktop PC draws.

\*) Based on a configuration with 2GB of memory, 160GB hard disk and Windows 7





#### What does "Barebone" mean?

Shuttle's barebones line such as the XS35V3 is targeted at experienced users seeking to build a complete system to meet their individual requirements. The bulk of components is yet built in, simply the following hardware is to be installed upon purchase in this case:

- One 6.35 cm/2.5" Serial ATA hard disk or Solid State Disk (SSD)
- One or two DDR3 SO-DIMM memory modules (204 pins), max. 4 GB
- USB keyboard and USB mouse
- Optional: Slim-line optical drive (12.7mm height, DVD/Blu-ray, slimline format)
- Operating system: Windows 7, 32 bit



#### Two monitor support with HDMI (DVI) and D-Sub/VGA

The integrated graphics supports multiple display support on up to two separate monitors via HDMI (DVI through optional adapter) and D-Sub/VGA. This improves the capabilities and productivity of the user by allowing them to spread multiple windows over two monitors and view them simultaneously.



#### 4-in-1 card reader

The built-in 4-in-1 card reader at the front side makes it easy to transfer files from your camera so you can share videos and photos on your XS35V3 with ease.



#### Kensington Lock

This is a small, metal-reinforced hole as part of an anti-theft system. As known from notebooks, this Mini-PC can also be safely locked by tying it to a solid object.

(The lock-and-cable apparatus is not included.)

#### Optional second hard disk (Accessory PHD2)

The optional accessory PHD2 supports a second 2.5" hard disk. Please note, that the bay for the optical drive will be occupied then.



#### Tiny power adapter

The external 40W power adapter is virtually noiseless and can easily be hidden behind the desk thanks to its tiny dimensions.

Dimensions: 89.5 x 37 x 26.5 mm (LWH) = 88ml



#### Easy installation

Remove just one screw to unmount the two chassis covers.



#### Optional VESA mount (Accessory PV01)

Its optional VESA75/100 wallmount allows it to be installed on to walls or just affixed on the rear side of a monitor which is particularly interesting for the industry segment, company buildings and public institutions.



#### 24/7 nonstop operation

Shuttle XS35V3 is officially approved for 24/7 permanent operation. Thanks to its low power consumption and completely passively cooling, this PC runs highly reliable making it perfectly suitable for digital signage and POI/POS applications.

#### Conditions for permanent use:

- Ambient temperature while under load: 5-35°C
- Air humidity while under load: 10-90% (not condensing)
- Free circulation of air amongst the PC must be guaranteed
- Ventilation holes must be clear
- If a hard disk is installed, this must also be approved for permanent operation by its manufacturer (max. one hard disk)



#### Note on operating position

Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.



## Shuttle Barebone XS35V3 Specifications

<i>Fanless and silent</i>	<p>Passive cooling, no fan noise at all</p> <p>Perfect to be used in noise-sensitive environments</p> <p>Fanless, dust-free and thus virtually maintenance-free</p>
<i>Chassis</i>	<p>Dimensions without Stand: 25.2 x 16.2 x 3.85 cm (DxHxW)</p> <p>Weight: 2.1 kg net, 2.8 kg gross</p> <p>Hole for the Kensington Lock at the back panel</p> <p>Optional accessory: 75mm and 100mm VESA mounting kit (PV01)</p>
<i>Operation System</i>	<p>This system comes without operating system.</p> <p>It is compatible with Windows 7 (32 bit)</p>
<i>Processor</i>	<p>Intel Dual Core Atom processor D2700 (Codename: Cedarview)</p> <p>Intel Hyper-Threading technology: 2-threads per core</p> <p>32 nm manufacturing process, Micro-FCBGA11 package</p> <p>Intel 64 architecture, Core clock: 2.16 GHz</p> <p>L2 Cache: 1024kB , TDP: max. 10W</p> <p>Supports SSE2, SSE3, SSSE3, Execute Disable Bit</p> <p>Integrated North Bridge with controller for memory and graphics</p>
<i>Cooling</i>	<p>Passive, completely fanless cooling through convective heat transfer</p> <p>Warning: Please make sure the system is always placed upright using either its stand or the optional VESA mount.</p> <p>Ventilation holes must not be blocked to ensure sufficient cooling.</p>
<i>Chipset</i>	<p>Intel® NM10 Express Chipset (south bridge)</p> <p>Platform Controller Hub (PCH)</p> <p>Code name: Tiger Point</p>
<i>BIOS</i>	<p>AMI BIOS in a 8Mbit Flash ROM supports PnP, ACPI 2.0</p> <p>Supports external USB flash memory card boot up</p> <p>Supports Power fail resume / AC power on state / always on / always off</p> <p>Supports Wake-on-LAN (WOL) from S3, S3, S5 ACPI states</p> <p>Supports Unified Extensible Firmware Interface (UEFI)</p>
<i>Memory</i>	<p>2x SO-DIMM slots with 204 pins</p> <p>Supports two modules DDR3-1066 (PC3-8500)</p> <p>DDR3-1333 is supported at DDR3-1066 clock rate</p> <p>Supported maximum capacity: 4 GB</p>
<i>Optical drive (opt.)</i>	<p>Support an optical DVD or Blu-ray slim-line drive</p> <p>Serial ATA interface, 12.7mm height, Slimline SATA connector</p>


<i>Hard disk drive or SSD</i>	<p>Supports one Serial ATA hard disk (5400 / 7200 rpm) or one SATA SSD drive in 6.35cm/2.5" format</p> <p>The SATA 2.0 interface supports up to 300MB/s data transfer speed</p> <p>Supports a drive with 9.5mm height (12.5mm is not supported)</p> <p>Supports Unified Extensible Firmware Interface (UEFI)</p>
<i>Integrated Graphics</i>	<p>The Graphics Processing Unit (GPU) is integrated into the processor Intel GMA 3650, Graphics Base Frequency: 640 MHz</p> <p>Supports DirectX 9</p> <p>Maximum shared memory: 8MB pre-allocated plus 384MB Video Memory Technology (DVMT)</p> <p>Two video outputs: HDMI v1.3 and D-Sub (VGA)</p> <p>Supports dual display in clone or extended mode</p>
<i>Integrated Audio</i>	<p>Integrated Audio</p> <p>IDT92HD81 Audio Codec with Azalia support</p> <p>Two analog audio connectors (3.5mm):</p> <ol style="list-style-type: none"> <li>1) Line out (head phone)</li> <li>2) microphone input</li> </ol> <p>Supports digital 7.1 HD audio via the HDMI port.</p>
<i>Card Reader</i>	<p>4-in-1 card reader at the front side</p> <p>Supports SDHC, SD, MS und MS-pro memory cards</p> <p>PCIe Interface</p>
<i>Wired Network</i>	<p>RJ45 connector supports Gigabit LAN at 10/100/1000 Mbit/sec.</p> <p>Network controller JMC 251</p> <p>Supports Wake-on-LAN (WOL) from S3, S3, S5 ACPI states</p>
<i>Wireless Network</i>	<p>Supports IEEE 802.11b/g/n, max. 150Mbps up-/downstream</p> <p>Security: WPA/WPA2(-PSK), WEP 64/128bit, IEEE 802.11x/i</p> <p>Half size Mini-PCIe-Card</p>
<i>Connectors</i>	<p>HDMI v1.3 digital video and audio output</p> <p>D-Sub/ VGA analog video ( 15 pin)</p> <p>5x USB 2.0 (1x front, 4x rear)</p> <p>Gigabit network (LAN, RJ45)</p> <p>Audio Line-out (head phone)</p> <p>Microphone input</p> <p>DC input for the external power adapter</p>
<i>LEDs and buttons</i>	<p>Power button</p> <p>Power LED (white)</p> <p>Hard disk LED (blue)</p>
<i>Power supply</i>	<p>External 40W AC/DC power adapter (fanless), 19V / 2.1A</p> <p>AC Input: 100~240V AC, 50~60Hz</p> <p>Automatic voltage adjust</p> <p>Dimensions: 89.5 x 37 x 26.5 mm (LWH)</p> <p>DC Connector: 5.5/2.5mm (outer/inner diameter)</p>

Optional accessories	<ul style="list-style-type: none"> <li>- VESA mount made of metal (PV01)</li> <li>- Adapter for second 2.5" drive instead of optical drive (PHD2)</li> </ul>
24/7 nonstop operation	<p>This device is approved for 24/7 permanent operation.</p> <p>Requirements:</p> <ul style="list-style-type: none"> <li>- Free circulation of air amongst the PC must be guaranteed.</li> <li>- Ventilation holes must be clear.</li> <li>- If a hard disk is installed, this must also be approved for permanent operation by its manufacturer (max. one hard disk)</li> </ul>
Environmental spec.	<p>Operating temperature range: 0~35°C</p> <p>Relative humidity range: 10~90% (non-condensing)</p>
Certification and Compliance	<p>EMI: CE, FCC, BSMI, C-Tick, CCC</p> <p>Safety: CB, BSMI, ETL</p> <p>Other compliances: RoHS, Eup Lot6</p> <p>This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU-guidelines:</p> <ul style="list-style-type: none"> <li>- EMV-guideline 89/336/EEG electromagnetic tolerance</li> <li>- LVD-guideline 73/23/EEG use of electric devices within certain voltage-limits</li> </ul>

## Comparison: Shuttle Slim-PC Barebone PC XS35 Series

Model	Graphics	HDMI	D-Sub	Processor	Memory (SO-DIMM)	Network
<b>XS35</b>	Intel GMA3150	-	Yes	Intel Atom D510	Max. 2GB DDR2-667/800	Fast Ethernet
<b>XS35GT</b>	NVIDIA ION2	Yes	Yes	(2x 1.66GHz)	1x SO-DIMM slot	
<b>XS35V2</b>	Intel GMA3150	-	Yes	Intel Atom D525	Max. 4GB DDR3-667/800	Gigabit LAN
<b>XS35GT V2</b>	NVIDIA ION2	Yes	Yes	(2x 1.80GHz)	1x SO-DIMM slot	
<b>XS35V3</b>	Intel GMA3650	Yes	Yes	Intel Atom D2700	Max. 4GB DDR3-800/1066	Gigabit LAN
<b>XS35GTA V3</b>	AMD Radeon HD 6430M	Yes	Yes	(2x 2.16GHz)	2x SO-DIMM slot	

## Shuttle Barebone XS35V3 – Connectors

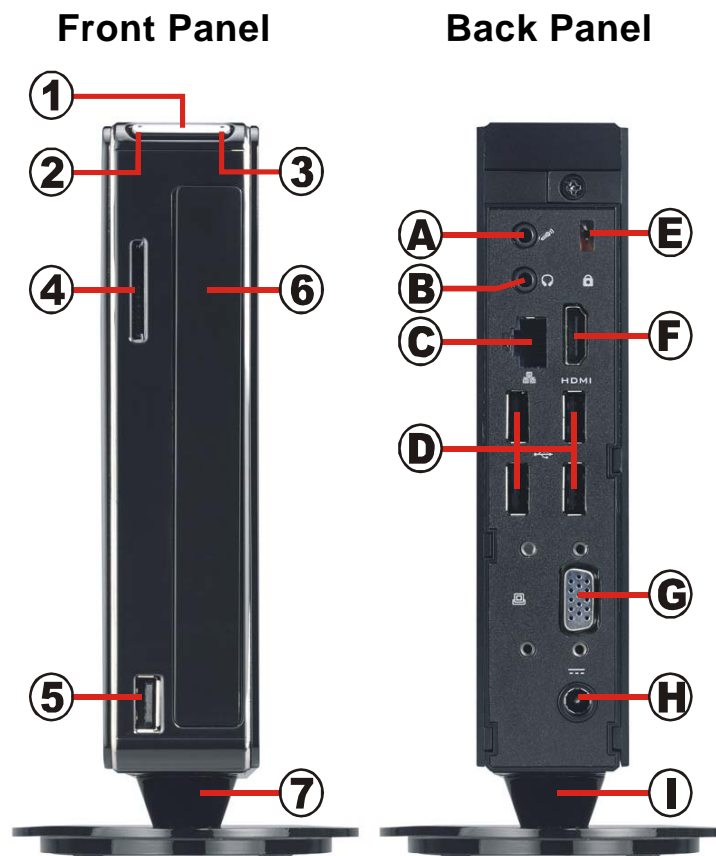

- 1 Power button
- 2 Power LED
- 3 Hard disk LED
- 4 4-in-1 card reader
- 5 USB connector
- 6 Bay for the optical slimline drive \*)
- 7 Vertical stand

- A Microphone input
- B Head phone output (Line out)
- C Gigabit LAN connector (RJ45)
- D 4x USB connectors
- E Hole for the Kensington-Lock
- F HDMI connector
- G D-Sub/VGA connector
- H Connector for the power adapter
- I Vertical stand

\*) Note: The optical drive is not included.

**Warning:**

Please make sure the system is always placed upright using either its stand or the optional VESA mount. Ventilation holes must not be blocked to ensure sufficient cooling.





Images are only for illustration purposes. The optical drive is not included.